




Espuma de poliuretano polieter y film PU-25M, para insonorización y aislamiento de cámaras de motores, etc. Color negro.
Se suministra por metros.



Expanded polyurethane polyeter resine anti-roar with PU-25M film for easy cleaning. Colour black.
Supplied by meters.

Resina in poliuretano PU-25M, per l'insonorizzazione e l'isolamento della camera del motore etc. Colore Nero.
Si vende a metro.

Mousse en résine polyuréthane PU-25M, pour l'insonorisation et l'isolation de la cale moteur etc. Couleur noire.
Vendue au mètre.



CON ADHESIVO
WITH ADHESIVE
CON ADESIVO
AVEC ADHESIF

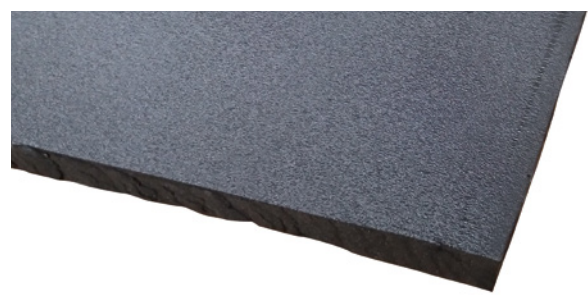



Espuma ignifuga de tecnotec con protección exterior de malla de aluminio y capa pesada para insonorización y aislamiento de cámaras de motores, etc. Color blanco.

Fire resistant double sandwich 20 mm melamine resine plus 5 mm. Antivibration polyurethane foil and alutec film.
For isolation of engine rooms, etc. Colour white

Resina ignifuga con maglia esterna in alluminio e strato pesante per l'isolamento acustico della camera del motore. Colore bianco.

Mousse en résine ignifuge avec plaque extérieure en alu et couche PU pour l'isolation acoustique de la cale moteur. Couleur blanche.

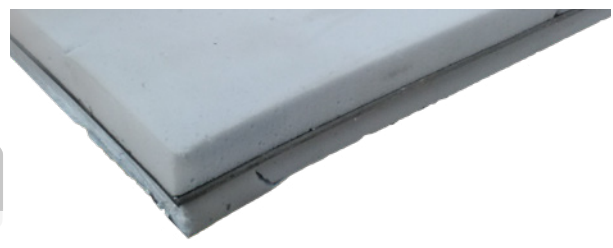

Pag. 576

SISTEMA DE ESCAPE • EXHAUST SYSTEM IMPIANTO DI SCARICO • SYSTEME D'ÉCHAPPEMENT

COLECTOR SILENCIADOR • EXHAUST SILENCER • MARMITTA • WATERLOCK





Colector de escape húmedo. Fabricado en plástico de alta densidad, resistente a altas temperaturas.

Exhaust muffler for water cooled engines.
Made in high density Eltex.

Marmitta in plastica di alta densità, resistente alle alte temperature.

Waterlock d'échappement pour moteurs refroidis par eau. Fabriqué en Eltex haute densité.

REF	Capacity (l)	Height (mm)	HP	B (mm)	C (mm)	D (mm)
GS38140	7 l	40-45-50	50 HP	220	150	485
GS38141	20 l	55-60-65	115 HP	320	220	660
GS38142	33 l	75 - 90	150 HP	400	290	760
GS38143	33 l	100- 115	300 HP	400	290	760

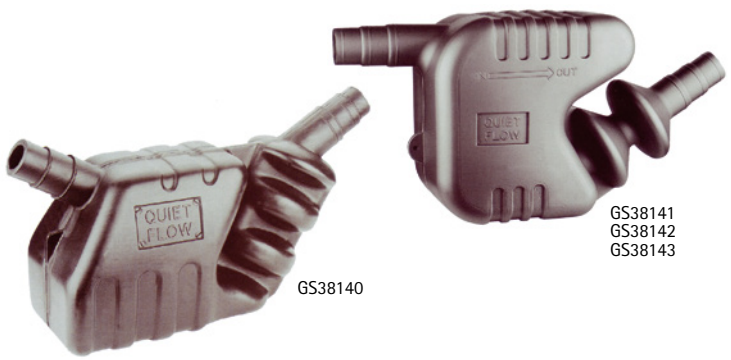

CUELLO DE CISNE • EXHAUST SYPHONS • COLLO D'OCA • COL DE CYGNE



Evita la entrada de agua exterior al sistema de escape. Fabricada en plástico de alta densidad, resistente a altas temperaturas.

Exhaust muffler-waterlock, for water cooled engines.
Made in high density Eltex.

Evita l'entrata dell'acqua nella marmitta.
In plastica di alta densità, resistente alle alte temperature.

Silencieux d'échappement, pour moteurs refroidis par eau. Fabriqué en Eltex haute densité.

REF	Angle	Height (mm)	B (mm)	C (mm)
GS38148	90°	40-45-50	480	110
GS38149	45°	40-45-50	480	110

