

CABRESTANTE MANUAL • MANUAL WINCHES • ARGANI MANUALI • TREUILS MANUELS



Fabricados en acero de alta calidad con protección de resina color negro, especial para el ambiente marino.

Made of rugged steel and special coated for marine protection.

In acciaio di alta qualità, con protezione in resina, colore nero, ideale per ambienti marini.

En acier de haute qualité avec protection en résine de couleur noire, idéal pour le milieu marin.


REF	POTENCIA CAPACITY POTENZA CAPACITE	RATIO RATIO RAPPORTO RATIO	KG	VELOCIDADES SPEED VELOCITA' VITESSE	(mm)	(mm)	(mm)
KBWT75-08	380 kg	3:1	1,9 kg	1	155	103,5	130
KBWT75-12	545 kg	4:1	2,8 kg	1	204,5	152,5	130
KBWT75-16	727 kg	4:1	3,1 kg	1	211,5	152,5	130
KBWT75-20	900 kg	4:1 - 10:1	5,3 kg	2	267,32	155,5	181,5

CON FRENO
WITH BRAKE
CON FRENO
AVEC FREIN

REF	POTENCIA CAPACITY POTENZA CAPACITE	RATIO RATIO RAPPORTO RATIO	KG	VELOCIDADES SPEED VELOCITA' VITESSE	(mm)	(mm)	(mm)
KBWT75-25	1100 kg	5:1 - 12:1	7,1 kg	2	325,5		206,5

CON FRENO AUTOMÁTICO
WITH AUTOMATIC BRAKE
CON FRENO AUTOMATICO
AVEC FREIN AUTOMATIQUE

REF	POTENCIA CAPACITY POTENZA CAPACITE	RATIO RATIO RAPPORTO RATIO	MANETA HANDLE MANOVELLA MANIVELLE	CAPACIDAD TAMBOR REEL CAPACITY CAPACITA' CAPACITE	(mm)	(mm)	(mm)
KBWT75G-12	545 kg	4:1	190 mm	5 mm x 15 m	203,5	162,8	182,5
KBWT75G-16	727 kg	5:1	250 mm	6 mm x 10 m	223	185	219,9
KBWT75G-20	900 kg	12:1	250 mm	5 mm x 30 m	241	187,5	282,3
KBWT75G-25	1100 kg	12:1	250 mm	6 mm x 27 m	241	187,5	282,3

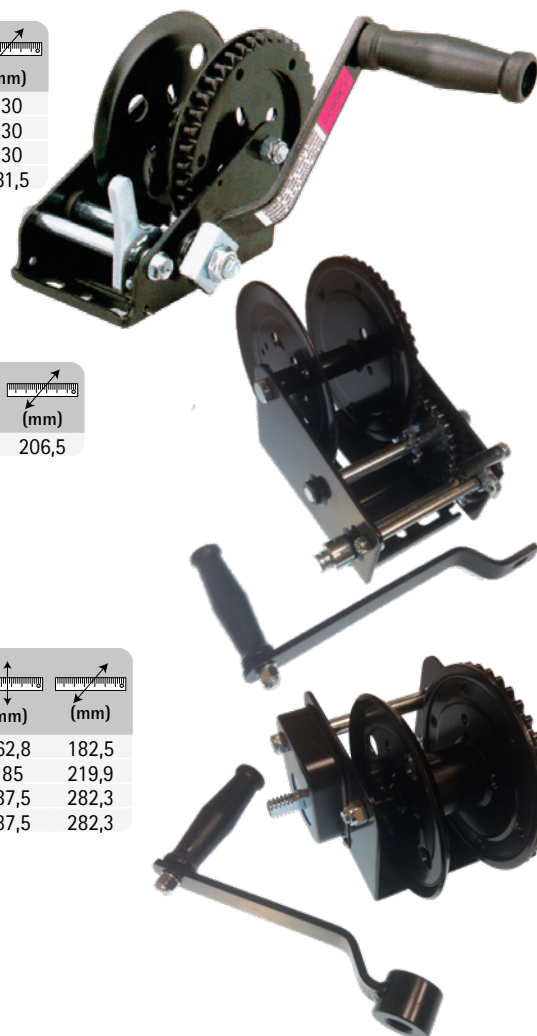

CABLE CABRESTANTE • WINCH CABLE • CAVI ARGANI • CABLE POUR TREUIL

Cable de acero, con mosquetón.

steel cable with heavy duty snap hook.

Cavo in acciaio, con moschettone.

Cable en acier avec mousqueton.

REF	(mm)	Ø	(mm)
GS76035	10 m	5 mm	1
GS76036	6 m	5 mm	1




CINCHA • STRAP • CINGHIA • SANGLES

CINCHA CABRESTANTE • WINCH STRAP • CINGHIA ARGANI • SANGLE POUR TREUIL

Cincha textil de poliéster con mosquetón.

High resistance polyester webbing, with snap hook.

Cinghia in poliester con moschettone.

Sangle en polyester avec mousqueton.

REF	CINCHA WEBBING CINGHIA SANGLE	KG	(mm)
KBWT70-15HD	50 mm x 4,6 m	1450 kg	1
KBWT70-20HD	50 mm x 6,1 m	1450 kg	1
KBWT70-25HD	50 mm x 7,6 m	1450 kg	1